



# Stainless Steel Ball Valves

## TECHNICAL SPECIFICATIONS SUBMITTAL FORM

Job Name:	Submittal Date:	Wholesaler:
Job Location:	Engineer/Architect:	Contractor:

### Product Use:

Full port ball valve for use in refrigeration, commercial HVAC, VRF, multi-mini split, sub-critical and trans-critical applications. Specifically designed for CO<sub>2</sub> refrigeration.

### Certifications and Approvals:

- CE
- RoHS
- CRN approved



### CO<sub>2</sub>-S/D Sizes, Ball Port Sizes, Kv/Cv, and Pressure Ratings

PART NUMBER	CONNECTIONS W		BALL PORT SIZE	KV	CV	MAX. OPERATING PRESSURE	
	MM	NPS, IN	MM	M3/H	GPM	BAR	PSI
CO2-02S <sup>^</sup>	6	-	10	0.8	0.9	140	2030
CO2-03S	10	-	10	3	3.5	140	2030
CO2-04S	12	-	10	5	5.8	140	2030
CO2-05S	16	-	14	17	19.7	140	2030
CO2-06S	18	-	16.5	17	19.7	140	2030
CO2-07S	22	-	18	29	33.5	140	2030
CO2-09S	28	-	25	51	59.0	140	2030
CO2-11S	35	-	31	81	93.6	140	2030
CO2-13S	42	-	37	105	121.4	120	1740
CO2-03D	DN08	1/4"	10	3	3.5	140	2030
CO2-04D	DN10	3/8"	14	9.8	11.3	140	2030
CO2-05D	DN15	1/2"	18	17	19.7	140	2030
CO2-07D	DN20	3/4"	25	40	46.2	140	2030
CO2-09D	DN25	1"	31	59	68.2	140	2030
CO2-11D	DN32	1-1/4"	37	105	121.4	130	1885
CO2-13D	DN40	1-1/2"	37	105	121.4	130	1885
CO2-17D	DN50	2"	50	214	247.4	125	1813
CO2-21D	DN65	2-1/2"	60	310	358	130	1885

<sup>^</sup>C19400 Copper Connections

### Design and Features:

- Full port valves with 2030 PSI (140 Bar) working pressure on sizes up to 35 mm / DN25 and 1740 PSI (120 Bar) working pressure on sizes 42 mm, DN32, DN40, and DN50
- Compatible with CO<sub>2</sub> (R744), HCFC, HFC, HFO refrigerants, and oils
- Teflon (PTFE) seals
- Rupture-proof encapsulated stem and bi-directional flow
- Stainless steel body
- 100% leak tested
- Stamped with serial number and packaged in poly-bag
- Two-year warranty

### Operating Specifications:

- Temperature: -40° to 302°F (-40°C to 150°C)
- Burst Pressure: 5 times the working pressure
- Life Expectancy: >50,000 cycles

### CO<sub>2</sub>-S/D Materials

PART	MATERIAL
STUBOUTS	Stainless Steel
SEALS & SEATS	Teflon (PTFE)
CAP	Stainless Steel
STEM	Stainless Steel
LOCK NUT	Stainless Steel
BODY	Stainless Steel
BALL	Stainless Steel

This specification and all information contained herein is the confidential and exclusive property of NDL Industries, Inc., and shall not be disclosed to others without the written consent of NDL Industries, Inc. This specification must be returned to NDL Industries, Inc. if requested.




# Stainless Steel Ball Valves

## CO<sub>2</sub>-S/D Dimensions

Model	W		A		B		C		D		E	
	MM	NPS, IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN
CO2-02S^	6	-	110	4.33"	56.1	2.21"	19	0.75"	57.3	2.26"	16	0.63"
CO2-03S	10	-	120	4.72"	56.1	2.21"	19	0.75"	62.3	2.45"	16	0.63"
CO2-04S	12	-	120	4.72"	56.1	2.21"	19	0.75"	62.3	2.45"	16	0.63"
CO2-05S	16	-	145	5.71"	55.8	2.20"	15	0.59"	76.8	3.02"	22	0.87"
CO2-06S	18	-	145	5.71"	63	2.48"	19	0.75"	78.3	3.08"	30	1.18"
CO2-07S	22	-	145	5.71"	63	2.48"	19	0.75"	78.3	3.08"	30	1.18"
CO2-09S	28	-	200	7.87"	82.8	3.26"	30	1.18"	105.8	4.17"	30	1.18"
CO2-11S	35	-	210	8.27"	98.7	3.89"	29.8	1.17"	113.7	4.48"	48	1.89"
CO2-13S	42	-	230	9.06"	108.5	4.27"	34	1.34"	119.4	4.70"	55	2.17"
CO2-03D	DN08	1/4"	120	4.72"	56.1	2.21"	19	0.75"	62.3	2.45"	16	0.63"
CO2-04D	DN10	3/8"	145	5.71"	55.8	2.20"	15	0.59"	76.8	3.02"	22	0.87"
CO2-05D	DN15	1/2"	145	5.71"	63	2.48"	19	0.75"	78.3	3.08"	30	1.18"
CO2-07D	DN20	3/4"	200	7.87"	82.8	3.26"	30	1.18"	105.8	4.17"	30	1.18"
CO2-09D	DN25	1"	210	8.27"	98.7	3.89"	29.8	1.17"	113.7	4.48"	48	1.89"
CO2-11D	DN32	1-1/4"	230	9.06"	108.5	4.27"	34	1.34"	119.4	4.70"	55	2.17"
CO2-13D	DN40	1-1/2"	280	11.02"	108.5	4.27"	34	1.34"	144.4	5.69"	55	2.17"
CO2-17D	DN50	2"	304	11.97"	130	5.12"	45.5	1.79"	172	6.77"	74	2.91"
CO2-21D	DN65	2-1/2"	305	12.01"	173	6.81"	59	2.32"	152.5	6.00"	96	3.78"

## Part Selection

	CO2-02S^	6 mm Stainless Steel Ball Valve
	CO2-03S	10 mm Stainless Steel Ball Valve
	CO2-04S	12 mm Stainless Steel Ball Valve
	CO2-05S	16 mm Stainless Steel Ball Valve
	CO2-06S	18 mm Stainless Steel Ball Valve
	CO2-07S	22 mm Stainless Steel Ball Valve
	CO2-09S	28 mm Stainless Steel Ball Valve
	CO2-11S	35 mm Stainless Steel Ball Valve
	CO2-13S	42 mm Stainless Steel Ball Valve
	CO2-03D	DN08 Stainless Steel Ball Valve
	CO2-04D	DN10 Stainless Steel Ball Valve
	CO2-05D	DN15 Stainless Steel Ball Valve
	CO2-07D	DN20 Stainless Steel Ball Valve
	CO2-09D	DN25 Stainless Steel Ball Valve
	CO2-11D	DN32 Stainless Steel Ball Valve
	CO2-13D	DN40 Stainless Steel Ball Valve
	CO2-17D	DN50 Stainless Steel Ball Valve
	CO2-21D	DN65 Stainless Steel Ball Valve

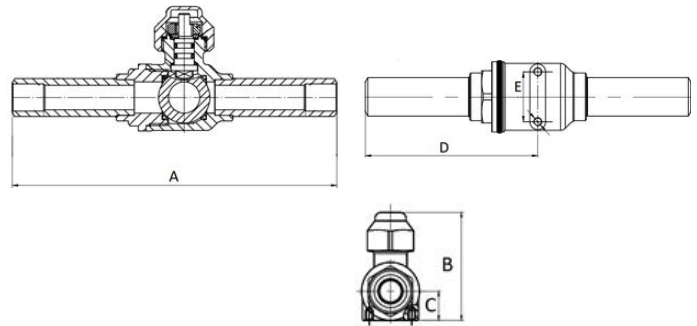

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer.

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality  
HVAC-R and plumbing products.

ndlinc.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries

