



Black Malleable Fittings

TECHNICAL SPECIFICATIONS SUBMITTAL FORM

Job Name:	Submittal Date:	Wholesaler:
Job Location:	Engineer/Architect:	Contractor:

Product Use:

Black Malleable Fittings for use in HVAC, Refrigeration, and Plumbing Applications.

Design and Features:

- Made of black steel and are used to connect lengths of pipe together or to change direction of pipe.
- Typically used in high-pressure applications such as gas lines, steam lines, and water lines. Also used in applications where pipes are exposed to corrosive elements, such as industrial settings.
- Often used in conjunction with black pipes, which are also made of black steel. Black coating on both pipe and the fittings helps protect them from rust and corrosion.
- Commonly used in plumbing and gas applications

Certifications and Approvals:

- ASTM A197/A197M – Materials standard
- FM approved – Factory Mutual approvals
- ASME B16.39 – Union dimensions standard
- ASME B16.3, ASME B16.14 – Dimensions standard
- UL/cUL certified – Underwriter Laboratories certification
- NSF 61 - Drinking Water System Components standard / certified
- NSF 372 – Safe Water Drinking Act (SDWA) lead-free plumbing requirements

Temperature Table

TEMPERATURE (°F)	CLASS 150 (PSIG)
-20°F to 150°F	300
200°F	265
250°F	225
300°F	185
350°F	150 (Note 1)

Note 1: Permissible for service temperature up to 365°F, reflecting the temperature of saturated steam at 150 PSIG.





Black Hex Bushing

Black Hex Bushings Dimensions and Selection


PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
BPF100-42	1/4" x 1/8" Black Hex Bushing	120	0.583"	0.033	15.0
BPF100-62	3/8" x 1/8" Black Hex Bushing	75	0.642"	0.047	21.3
BPF100-64	3/8" x 1/4" Black Hex Bushing	75	0.642"	0.038	17.2
BPF100-82	1/2" x 1/8" Black Hex Bushing	150	0.748"	0.086	39.0
BPF100-84	1/2" x 1/4" Black Hex Bushing	150	0.748"	0.082	37.2
BPF100-86	1/2" x 3/8" Black Hex Bushing	150	0.748"	0.065	29.5
BPF100-122	3/4" x 1/8" Black Hex Bushing	75	0.850"	0.151	68.5
BPF100-124	3/4" x 1/4" Black Hex Bushing	75	0.850"	0.144	65.3
BPF100-126	3/4" x 3/8" Black Hex Bushing	75	0.850"	0.135	61.2
BPF100-128	3/4" x 1/2" Black Hex Bushing	75	0.850"	0.112	50.8
BPF100-166	1" x 3/8" Black Hex Bushing	50	1.051"	0.2	90.7
BPF100-168	1" x 1/2" Black Hex Bushing	50	1.004"	0.223	101.2
BPF100-1612	1" x 3/4" Black Hex Bushing	50	1.004"	0.183	83.0
BPF100-208	1-1/4" x 1/2" Black Hex Bushing	30	1.138"	0.322	146.1
BPF100-2012	1-1/4" x 3/4" Black Hex Bushing	30	1.079"	0.366	166.0
BPF100-2016	1-1/4" x 1" Black Hex Bushing	30	1.079"	0.277	125.6
BPF100-246	1-1/2" x 3/8" Black Hex Bushing	25	1.201"	0.352	159.7
BPF100-248	1-1/2" x 1/2" Black Hex Bushing	25	1.201"	0.389	176.4
BPF100-2412	1-1/2" x 3/4" Black Hex Bushing	25	1.201"	0.435	197.3
BPF100-2416	1-1/2" x 1" Black Hex Bushing	25	1.142"	0.451	204.6
BPF100-2420	1-1/2" x 1-1/4" Black Hex Bushing	25	1.142"	0.308	139.7
BPF100-328	2" x 1/2" Black Hex Bushing	20	1.291"	0.523	237.2
BPF100-3212	2" x 3/4" Black Hex Bushing	20	1.291"	0.587	266.3
BPF100-3216	2" x 1" Black Hex Bushing	20	1.291"	0.616	279.4
BPF100-3220	2" x 1-1/4" Black Hex Bushing	20	1.220"	0.74	335.7
BPF100-3224	2" x 1-1/2" Black Hex Bushing	20	1.220"	0.616	279.4

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.

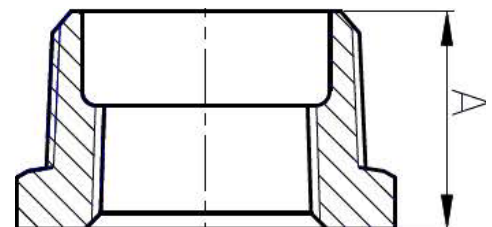

Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Caps

Black Caps Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF104-4	1/4" Black Cap	80	0.630"	0.049	22.2
	BPF104-6	3/8" Black Cap	60	0.740"	0.077	34.9
	BPF104-8	1/2" Black Cap	75	0.870"	0.113	51.3
	BPF104-12	3/4" Black Cap	40	0.969"	0.183	83.0
	BPF104-16	1" Black Cap	25	1.161"	0.306	138.8
	BPF104-20	1-1/4" Black Cap	20	1.280"	0.451	204.6
	BPF104-24	1-1/2" Black Cap	18	1.331"	0.554	251.3
	BPF104-32	2" Black Cap	12	1.449"	0.878	398.3
	BPF104-48	3" Black Cap	EA	1.799"	2.209	1002.0

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.

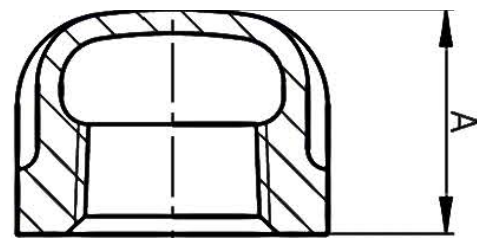

Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Couplings

Black Couplings Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF99-2	1/8" Black Coupling	70	0.961"	0.054	24.5
	BPF99-4	1/4" Black Coupling	40	1.059"	0.084	38.1
	BPF99-6	3/8" Black Coupling	40	1.161"	0.122	55.3
	BPF99-8	1/2" Black Coupling	60	1.339"	0.176	79.8
	BPF99-12	3/4" Black Coupling	50	1.520"	0.279	126.6
	BPF99-16	1" Black Coupling	25	1.669"	0.434	196.9
	BPF99-20	1-1/4" Black Coupling	16	1.929"	0.694	314.8
	BPF99-24	1-1/2" Black Coupling	18	2.150"	0.927	420.5
	BPF99-32	2" Black Coupling	12	2.531"	1.387	629.1
	BPF99-40	2-1/2" Black Coupling	8	2.882"	2.35	1065.9
	BPF99-48	3" Black Coupling	EA	3.181"	3.37	1528.6
	BPF99-64	4" Black Coupling	3	3.661"	5.602	2541.0

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Reducing Couplings

Black Reducing Couplings Dimensions and Selection


PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
BPF98R-42	1/4" x 1/8" Black Reducing Coupling	50	1.000"	0.068	30.8
BPF98R-62	3/8" x 1/8" Black Reducing Coupling	35	1.130"	0.093	42.2
BPF98R-64	3/8" x 1/4" Black Reducing Coupling	30	1.130"	0.106	48.1
BPF98R-82	1/2" x 1/8" Black Reducing Coupling	150	1.252"	0.128	58.1
BPF98R-84	1/2" x 1/4" Black Reducing Coupling	150	1.252"	0.134	60.8
BPF98R-86	1/2" x 3/8" Black Reducing Coupling	60	1.252"	0.149	67.6
BPF98R-122	3/4" x 1/8" Black Reducing Coupling	70	1.441"	0.181	82.1
BPF98R-124	3/4" x 1/4" Black Reducing Coupling	45	1.437"	0.204	92.5
BPF98R-126	3/4" x 3/8" Black Reducing Coupling	45	1.441"	0.217	98.4
BPF98R-128	3/4" x 1/2" Black Reducing Coupling	60	1.441"	0.244	110.7
BPF98R-166	1" x 3/8" Black Reducing Coupling	30	1.689"	0.304	137.9
BPF98R-168	1" x 1/2" Black Reducing Coupling	30	1.689"	0.349	158.3
BPF98R-1612	1" x 3/4" Black Reducing Coupling	25	1.689"	0.387	175.5
BPF98R-208	1-1/4" x 1/2" Black Reducing Coupling	25	2.059"	0.494	224.1
BPF98R-2012	1-1/4" x 3/4" Black Reducing Coupling	25	2.059"	0.538	244.0
BPF98R-2016	1-1/4" x 1" Black Reducing Coupling	15	2.059"	0.589	267.2
BPF98R-246	1-1/2" x 3/8" Black Reducing Coupling	20	2.311"	0.644	292.1
BPF98R-248	1-1/2" x 1/2" Black Reducing Coupling	20	2.311"	0.614	278.5
BPF98R-2412	1-1/2" x 3/4" Black Reducing Coupling	15	2.311"	0.681	308.9
BPF98R-2416	1-1/2" x 1" Black Reducing Coupling	25	2.311"	0.759	344.3
BPF98R-2420	1-1/2" x 1-1/4" Black Reducing Coupling	12	2.311"	0.818	371.0
BPF98R-328	2" x 1/2" Black Reducing Coupling	12	2.811"	0.996	451.8
BPF98R-3212	2" x 3/4" Black Reducing Coupling	12	2.811"	0.974	441.8
BPF98R-3216	2" x 1" Black Reducing Coupling	12	2.811"	1.033	468.6
BPF98R-3220	2" x 1-1/4" Black Reducing Coupling	9	2.811"	1.129	512.1
BPF98R-3224	2" x 1-1/2" Black Reducing Coupling	9	2.811"	1.242	563.4

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Reducing Couplings - *Continued*

Black Reducing Couplings Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF98R-4016	2-1/2" x 1" Black Reducing Coupling	10	3.252"	1.77	802.9
	BPF98R-4032	2-1/2" x 2" Black Reducing Coupling	7	3.252"	2.119	961.2
	BPF98R-4816	3" x 1" Black Reducing Coupling	6	3.689"	2.49	1129.4
	BPF98R-4824	3" x 1-1/2" Black Reducing Coupling	6	3.689"	2.706	1227.4
	BPF98R-4832	3" x 2" Black Reducing Coupling	6	3.689"	2.783	1262.3
	BPF98R-4840	3" x 2-1/2" Black Reducing Coupling	5	3.689"	3.156	1431.5

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Crosses

Black Crosses Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF314-8	1/2" Black Cross	30	1.122"	0.377	171.0
	BPF314-12	3/4" Black Cross	20	1.311"	0.606	274.9
	BPF314-32	2" Black Cross	5	2.252"	2.937	1332.2

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black 45° Elbows

Black 45° Elbows Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF309-45-4	1/4" Black 45° Elbow	30	0.728"	0.098	44.5
	BPF309-45-6	3/8" Black 45° Elbow	75	0.799"	0.148	67.1
	BPF309-45-8	1/2" Black 45° Elbow	50	0.882"	0.201	91.2
	BPF309-45-12	3/4" Black 45° Elbow	40	0.980"	0.329	149.2
	BPF309-45-16	1" Black 45° Elbow	20	1.122"	0.521	236.3
	BPF309-45-20	1-1/4" Black 45° Elbow	20	1.291"	0.777	352.4
	BPF309-45-24	1-1/2" Black 45° Elbow	10	1.429"	1.01	458.1
	BPF309-45-32	2" Black 45° Elbow	12	1.681"	1.639	743.4

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black 45° Street Elbows

Black 45° Street Elbows Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	B (IN)	WT (LB)	WT (G)
	BPF310-45-8	1/2" Black 45° Street Elbow	75	0.882"	1.150"	0.173	78.5
	BPF310-45-12	3/4" Black 45° Street Elbow	40	0.980"	1.291"	0.282	127.9
	BPF310-45-16	1" Black 45° Street Elbow	25	1.122"	1.469"	0.452	205.0
	BPF310-45-20	1-1/4" Black 45° Street Elbow	10	1.291"	1.709"	0.711	322.5
	BPF310-45-32	2" Black 45° Street Elbow	12	1.681"	2.220"	1.507	683.6

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





90° Long Run Elbows

90° Long Run Elbows Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF309-2	1/8" Black 90° LR Elbow	50	0.689"	0.064	29.0
	BPF309-4	1/4" Black 90° LR Elbow	35	0.811"	0.102	46.3
	BPF309-6	3/8" Black 90° LR Elbow	90	0.949"	0.151	68.5
	BPF309-8	1/2" Black 90° LR Elbow	50	1.122"	0.224	101.6
	BPF309-12	3/4" Black 90° LR Elbow	35	1.311"	0.359	162.8
	BPF309-16	1" Black 90° LR Elbow	20	1.500"	0.572	259.5
	BPF309-20	1-1/4" Black 90° LR Elbow	20	1.752"	0.901	408.7
	BPF309-24	1-1/2" Black 90° LR Elbow	15	1.941"	1.238	561.5
	BPF309-32	2" Black 90° LR Elbow	8	2.252"	1.866	846.4
	BPF309-40	2-1/2" Black 90° LR Elbow	EA	2.701"	3.369	1528.2
	BPF309-48	3" Black 90° LR Elbow	EA	3.079"	5.225	2370.0

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black 90° Reducing Elbows

Black 90° Reducing Elbows Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	B (IN)	WT (LB)	WT (G)
	BPF309R-62	3/8" x 1/8" Black 90° Reducing Elbow	105	0.807"	0.850"	0.107	48.5
	BPF309R-64	3/8" x 1/4" Black 90° Reducing Elbow	90	0.882"	0.902"	0.127	57.6
	BPF309R-82	1/2" x 1/8" Black 90° Reducing Elbow	60	0.866"	0.906"	0.142	64.4
	BPF309R-84	1/2" x 1/4" Black 90° Reducing Elbow	60	0.969"	0.980"	0.164	74.4
	BPF309R-86	1/2" x 3/8" Black 90° Reducing Elbow	60	1.039"	1.031"	0.184	83.5
	BPF309R-124	3/4" x 1/4" Black 90° Reducing Elbow	40	1.051"	1.079"	0.22	99.8
	BPF309R-128	3/4" x 1/2" Black 90° Reducing Elbow	40	1.201"	1.220"	0.305	138.3
	BPF309R-168	1" x 1/2" Black 90° Reducing Elbow	25	1.260"	1.398"	0.415	188.2
	BPF309R-1612	1" x 3/4" Black 90° Reducing Elbow	50	1.370"	1.449"	0.494	224.1
	BPF309R-208	1-1/4" x 1/2" Black 90° Reducing Elbow	20	1.339"	1.531"	0.559	253.6
	BPF309R-2012	1-1/4" x 3/4" Black 90° Reducing Elbow	10	1.449"	1.622"	0.647	293.5
	BPF309R-2016	1-1/4" x 1" Black 90° Reducing Elbow	15	1.579"	1.669"	0.757	343.4
	BPF309R-248	1-1/2" x 1/2" Black 90° Reducing Elbow	25	1.378"	1.634"	0.655	297.1
	BPF309R-2416	1-1/2" x 1" Black 90° Reducing Elbow	20	1.650"	1.799"	0.902	409.1
	BPF309R-2420	1-1/2" x 1-1/4" Black 90° Reducing Elbow	15	1.819"	1.882"	1.032	468.1
	BPF309R-328	2" x 1/2" Black 90° Reducing Elbow	10	1.476"	1.870"	0.953	432.3
	BPF309R-3212	2" x 3/4" Black 90° Reducing Elbow	9	1.598"	1.969"	1.073	486.7
	BPF309R-3216	2" x 1" Black 90° Reducing Elbow	14	1.728"	2.020"	1.252	567.9
	BPF309R-3220	2" x 1-1/4" Black 90° Reducing Elbow	10	1.902"	2.098"	1.363	618.2
	BPF309R-3224	2" x 1-1/2" Black 90° Reducing Elbow	10	2.020"	2.161"	1.56	707.6
	BPF309R-4016	2-1/2" x 1" Black 90° Reducing Elbow	15	1.811"	2.311"	1.877	851.4

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer.

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.

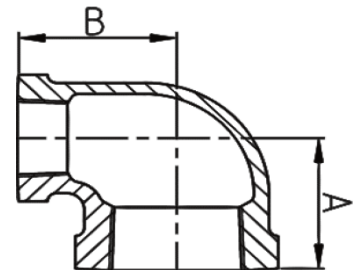

Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black 90° Street Elbows

Black 90° Street Elbows Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	B (IN)	WT (LB)	WT (G)
	BPF310-2	1/8" Black 90° Street Elbow	60	0.689"	1.000"	0.053	24.0
	BPF310-4	1/4" Black 90° Street Elbow	35	0.811"	1.189"	0.097	44.0
	BPF310-6	3/8" Black 90° Street Elbow	60	0.949"	1.441"	0.15	68.0
	BPF310-8	1/2" Black 90° Street Elbow	60	1.122"	1.622"	0.208	94.3
	BPF310-12	3/4" Black 90° Street Elbow	35	1.311"	1.890"	0.346	156.9
	BPF310-16	1" Black 90° Street Elbow	45	1.500"	2.142"	0.54	244.9
	BPF310-20	1-1/4" Black 90° Street Elbow	25	1.752"	2.449"	0.813	368.8
	BPF310-24	1-1/2" Black 90° Street Elbow	9	1.941"	2.689"	1.18	535.2
	BPF310-32	2" Black 90° Street Elbow	8	2.252"	3.260"	1.844	836.4

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Floor Flanges

Black Floor Flanges Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF321-8	1/2" Black Floor Flange	25	0.551"	0.355	161.0
	BPF321-12	3/4" Black Floor Flange	15	0.630"	0.494	224.1
	BPF321-16	1" Black Floor Flange	15	0.669"	0.637	288.9
	BPF321-20	1-1/4" Black Floor Flange	10	0.748"	0.834	378.3
	BPF321-24	1-1/2" Black Floor Flange	8	0.866"	1.114	505.3
	BPF321-11	2" Black Floor Flange	8	0.984"	1.549	702.6

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Lock Nuts

Black Lock Nuts Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	B (IN)	C (IN)	WT (LB)	WT (G)
	BPF319-6	3/8" Black Lock Nut	125	0.283"	1.000"	0.772"	0.045	20.4
	BPF319-8	1/2" Black Lock Nut	150	0.311"	1.181"	0.969"	0.056	25.4

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Square Cored Plugs

Black Square Head Solid Plugs Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF102-8	1/2" Black Square Cored Plug	50	0.941"	0.081	36.7
	BPF102-12	3/4" Black Square Cored Plug	30	1.071"	0.131	59.4
	BPF102-24	1-1/2" Black Square Cored Plug	EA	1.453"	0.416	188.7

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Square Head Solid Plugs

Black Square Head Solid Plugs Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF101-2	1/8" Black Square Head Solid Plug	400	0.610"	0.016	7.3
	BPF101-4	1/4" Black Square Head Solid Plug	150	0.720"	0.033	15.0
	BPF101-6	3/8" Black Square Head Solid Plug	120	0.791"	0.048	21.8
	BPF101-8	1/2" Black Square Head Solid Plug	50	0.941"	0.081	36.7
	BPF101-12	3/4" Black Square Head Solid Plug	35	1.071"	0.131	59.4
	BPF101-16	1" Black Square Head Solid Plug	20	1.252"	0.192	87.1
	BPF101-20	1-1/4" Black Square Head Solid Plug	30	1.358"	0.314	142.4
	BPF101-24	1-1/2" Black Square Head Solid Plug	30	1.453"	0.416	188.7
	BPF101-32	2" Black Square Head Solid Plug	20	1.563"	0.644	292.1
	BPF101-48	3" Black Square Head Solid Plug	20	1.929"	1.592	722.1

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Tees

Black Tees Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF311-2	1/8" Black Tee	120	1.378"	0.093	42.2
	BPF311-4	1/4" Black Tee	75	1.622"	0.145	65.8
	BPF311-6	3/8" Black Tee	45	1.898"	0.215	97.5
	BPF311-8	1/2" Black Tee	40	2.244"	0.317	143.8
	BPF311-12	3/4" Black Tee	35	2.622"	0.515	233.6
	BPF311-16	1" Black Tee	20	3.000"	0.831	376.9
	BPF311-20	1-1/4" Black Tee	14	3.504"	1.219	552.9
	BPF311-24	1-1/2" Black Tee	12	3.882"	1.678	761.1
	BPF311-32	2" Black Tee	8	4.504"	2.454	1113.1
	BPF311-48	3" Black Tee	EA	6.157"	6.546	2969.2

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Reducing Tees

Black Reducing Tees Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF311R-884	1/2" x 1/2" x 1/4" Black Reducing Tee	40	1.949"	0.245	111.1
	BPF311R-12124	3/4" x 3/4" x 1/4" Black Reducing Tee	25	2.130"	0.364	165.1
	BPF311R-12128	3/4" x 3/4" x 1/2" Black Reducing Tee	20	2.421"	0.451	204.6
	BPF311R-16164	1" x 1" x 1/4" Black Reducing Tee	20	2.323"	0.551	249.9
	BPF311R-16168	1" x 1" x 1/2" Black Reducing Tee	15	2.657"	0.639	289.8
	BPF311R-161620	1" x 1" x 1-1/4" Black Reducing Tee	11	3.248"	0.984	446.3
	BPF311R-32328	2" x 2" x 1/2" Black Reducing Tee	10	3.374"	1.546	701.3
	BPF311R-323212	2" x 2" x 3/4" Black Reducing Tee	10	3.567"	1.67	757.5
	BPF311R-323216	2" x 2" x 1" Black Reducing Tee	10	3.748"	1.799	816.0
	BPF311R-323220	2" x 2" x 1-1/4" Black Reducing Tee	8	4.000"	1.993	904.0
	BPF311R-323224	2" x 2" x 1-1/2" Black Reducing Tee	8	4.181"	2.14	970.7
	BPF311R-40408	2-1/2" x 2-1/2" x 1/2" Black Reducing Tee	6	3.858"	2.625	1190.7
	BPF311R-484812	3" x 3" x 3/4" Black Reducing Tee	3	4.480"	3.811	1728.6
	BPF311R-484832	3" x 3" x 2" Black Reducing Tee	3	5.409"	5.019	2276.6

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer.

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Reducing Tees

Black Reducing Tees Dimensions and Selection


PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
BPF311R-1288	3/4" x 1/2" x 1/2" Black Reducing Tee	25	2.323"	0.394	178.7
BPF311R-12812	3/4" x 1/2" x 3/4" Black Reducing Tee	20	2.555"	0.459	208.2
BPF311R-1688	1" x 1/2" x 1/2" Black Reducing Tee	20	2.382"	0.51	231.3
BPF311R-168128	1" x 3/4" x 1/2" Black Reducing Tee	20	2.461"	0.563	255.4
BPF311R-16812	1" x 1/2" x 3/4" Black Reducing Tee	20	2.591"	0.591	268.1
BPF311R-161212	1" x 3/4" x 3/4" Black Reducing Tee	15	2.760"	0.628	284.9
BPF311R-16816	1" x 1/2" x 1" Black Reducing Tee	15	2.898"	0.689	312.5
BPF311R-161216	1" x 3/4" x 1" Black Reducing Tee	12	2.949"	0.742	336.6
BPF311R-201212	1-1/4" x 3/4" x 3/4" Black Reducing Tee	10	2.756"	0.746	338.4
BPF311R-21612	1-1/4" x 1" x 3/4" Black Reducing Tee	20	2.819"	0.858	389.2
BPF311R-201216	1-1/4" x 3/4" x 1" Black Reducing Tee	10	3.028"	0.875	396.9
BPF311R-20820	1-1/4" x 1/2" x 1-1/4" Black Reducing Tee	20	3.283"	0.951	431.4
BPF311R-201220	1-1/4" x 3/4" x 1-1/4" Black Reducing Tee	20	3.374"	1	453.6
BPF311R-201620	1-1/4" x 1" x 1-1/4" Black Reducing Tee	15	3.421"	1.101	499.4
BPF311R-201616	1-1/4" x 1" x 1" Black Reducing Tee	20	3.079"	1.119	507.6
BPF311R-24824	1-1/2" x 1/2" x 1-1/2" Black Reducing Tee	12	3.602"	1.242	563.4
BPF311R-321616	2" x 1" x 1" Black Reducing Tee	12	3.563"	1.401	635.5

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Reducing Tees

Black Reducing Tees Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF311R-8812	1/2" x 1/2" x 3/4" Black Reducing Tee	30	2.421"	0.392	177.8
	BPF311R-121216	3/4" x 3/4" x 1" Black Reducing Tee	40	2.819"	0.635	288
	BPF311R-161620	1" x 1" x 1-1/4" Black Reducing Tee	11	3.248"	0.984	446.3
	BPF311R-161624	1" x 1" x 1-1/2" Black Reducing Tee	9	3.449"	1.123	509.4

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.

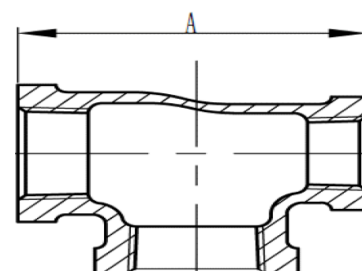

Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries





Black Unions

Black Unions Dimensions and Selection


	PART #	OD - DESCRIPTION	BOX QTY	A (IN)	WT (LB)	WT (G)
	BPF107-2	1/8" Black Union	60	1.260"	0.163	73.8
	BPF107-4	1/4" Black Union	20	1.437"	0.224	101.4
	BPF107-6	3/8" Black Union	40	1.614"	0.328	148.7
	BPF107-8	1/2" Black Union	50	1.713"	0.395	179.0
	BPF107-12	3/4" Black Union	35	1.949"	0.581	263.4
	BPF107-16	1" Black Union	20	2.067"	0.842	381.7
	BPF107-20	1-1/4" Black Union	15	2.264"	1.191	540.3
	BPF107-24	1-1/2" Black Union	10	2.402"	1.716	778.4
	BPF107-32	2" Black Union	6	2.756"	2.160	979.8
	BPF107-40	2-1/2" Black Union	4	3.228"	3.745	1698.7

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of a product.

All installations must completely comply with all NDL Industries warnings and instructions, national state and local codes and all applicable ANSI standards.

NDL Industries product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Customer

Service. NDL Industries reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on NDL products previously or subsequently sold.



Explore our full line of high-quality
HVAC-R, CO₂ Refrigeration, and Hydronic products.

ndlindustries.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries

